




passenger elevator purpose tractor



GDB-132-630


Load: 630kg
Voltage: 380V
Suspension: 2:1
Center height: 132mm
Item weight: 150kg
Max. static load: 3000kg
Brake: DC198V 2*0.38A



Spec.	Load kg	Lift speed m/s	Rated power kw	Rated frequency Hz	Rated speed r/min	Sheave dia. mm	Traction belt qty	INS. class	IP code	Cooling type	Brake
GDB132-630-6. 3-34	630	0.63	2.6	20.5	205	117	3	F	IP44	T<65°C natural, T≥65°C Fan cooling	block
GDB132-630-10-34	630	1	4.2	32.6	326	117	3	F	IP44	T<65°C natural, T≥65°C Fan cooling	block
GDB132-630-16-34	630	1.6	6.7	52.2	522	117	3	F	IP44	T<65°C natural, T≥65°C Fan cooling	block


this tractor need to use purposed traction belt,belt lock, guide pulley

passenger elevator purpose tractor



GDB-132-800

Load: 800kg
Voltage: 380V
Suspension: 2:1
Center height: 132mm
Item weight: 170kg
Max. static load: 3000kg
Brake: DC198V 2*0.38A

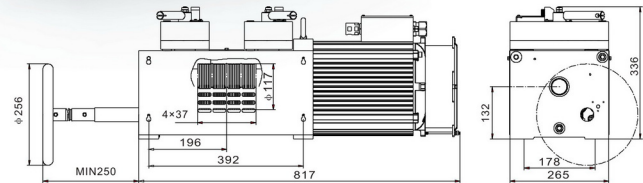

Spec.	Load kg	Lift speed m/s	Rated power kw	Rated frequency Hz	Rated speed r/min	Sheave dia. mm	Traction belt qty	INS. class	IP code	Cooling type	Brake
GDB132-800-10-34	800	1	5.4	32.6	326	117	4	F	IP44	T<65°C natural, T≥65°C Fan cooling	block
GDB132-800-16-34	800	1.6	8.6	52.2	522	117	4	F	IP44	T<65°C natural, T≥65°C Fan cooling	block
GDB132-800-20-34	800	2	10.7	65.3	653	117	4	F	IP44	T<65°C natural, T≥65°C Fan cooling	block

this tractor need to use purposed traction belt,belt lock, guide pulley