
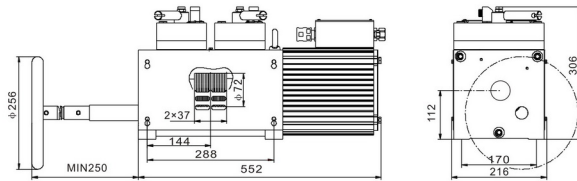


home elevator purpose tractor

GDB-112-320

Load: 320kg
Voltage: 220/380V
Suspension: 2:1
Center height: 112mm
Item weight: 80kg
Max. static load: 1000kg
Brake: DC198V 2°0.18A






Spec.	Load kg	Lift speed m/s	Rated power kw	Rated frequency Hz	Rated speed r/min	Sheave dia. mm	Traction belt qty	INS. class	IP code	Cooling type	Brake
GDB112-320-04-12	320	0.4	0.88	14	210	72	2	F	IP44	natural	block
GDB112-320-04-34	320	0.4	0.88	14	210	72	2	F	IP44	natural	block

this tractor need to use purposed traction belt,belt lock, guide pulley

home elevator purpose tractor

GDB-112-400

Load: 400kg
Voltage: 220/380V
Suspension: 2:1
Center height: 112mm
Item weight: 90kg
Max. static load: 1000kg
Brake: DC198V 2°0.18A

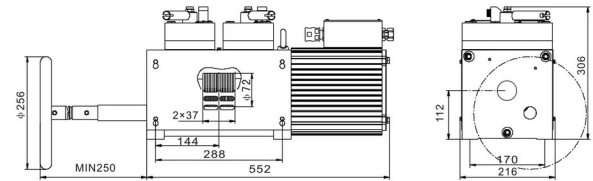

Spec.	Load kg	Lift speed m/s	Rated power kw	Rated frequency Hz	Rated speed r/min	Sheave dia. mm	Traction belt qty	INS. class	IP code	Cooling type	Brake
GDB112-400-04-12	400	0.4	1.1	14	210	72	2	F	IP44	natural	block
GDB112-400-04-34	400	0.4	1.1	14	210	72	2	F	IP44	natural	block

this tractor need to use purposed traction belt,belt lock, guide pulley